

BMC-2112MVA

2MP Mini vandal Dome Camera

High performance Starlight camera
Delivering clear images in any environment

2MP
FULL HD

High Resolution
1920 x 1080



2MP
FULL HD

2MP
High Resolution
1920 x 1080



AHD / TVI / CVBS
Multi Output



Camera with
Built-in Audio

KEY FEATURES



2M SONY CMOS
1/2.8" 2Megapixel SONY CMOS (EXMOR) delivers excellent Image quality



Multi Output
Supports TVI / CVI / AHD / CVBS Output for flexible compatibility



Advanced DNR
3D + 2D Digital Noise Reduction
Minimizes noise and ensures Clean images.



INFRARED (IR) LEDs
940nm Invisible IR B/W Mode



Built-in audio (c-mic)
In-Vehicle Optimized Audio System

RECOMMENDED APPLICATIONS



**PUBLIC
TRANSPORT**
Bus / Coach



**SCHOOL
BUS**
Student
Safety



**DRIVER
MONITORING**
Support
Systems



**PASSENGER
SAFETY**
In-cabin
Monitoring



**COMMERCIAL
VEHICLE**


TECHNICAL SPECIFICATIONS

ITEM	SPECIFICATIONS
Image Sensor	1/2.8" 2Megapixel SONY CMOS (EXMOR)
Total pixels	1945(H) X 1109(V) = 2.16M pixels
Active pixels	1937(H) X 1097(V) = .2.12M pixels
LENS	2.8MM , 3.6MM , 6MM ,
Resolution	Digital : 1080p 30fps
Min. illumination	More than 0 lux [ir leds 12 ea]
Operating Temperature	-10°C ~ +50°C (Humidity: 0%RH ~ 80%RH)
Storage Temperature	-20°C ~ +60°C (Humidity: 0%RH ~ 80%RH)
S/N Ratio	More than 54dB (AGC off)
Frequency	50Hz / 60 Hz
Video out	TVI / AHD / CVBS
Power input (consumption)	DC12V (IR OFF : 80mA , IR ON : 240mA)

PERFORMANCE



DIMENSIONS

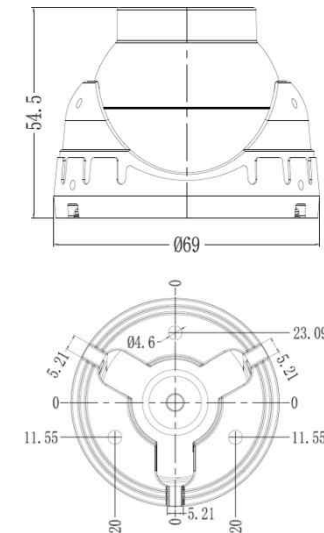

www.bk-solution.com

