

BMC-21D

2MP Interior Plastic Dome Camera

High performance Starlight camera
Delivering clear images in any environment

2MP
FULL HD

High Resolution
1920 x 1080

2MP
FULL HD

2MP
High Resolution
1920 x 1080



HD-SDI / EX-SDI
AHD / TVI / CVBS
Multi Output



KEY FEATURES



2M SONY CMOS
1/2.8" 2Megapixel SONY CMOS (EXMOR) delivers excellent Image quality



Multi Output
Supports EX-SDI , HD-SDI
TVI, CVI / AHD / CVBS
Output for flexible compatibility



Advanced DNR
3D + 2D Digital Noise Reduction
Minimizes noise and ensures
Clean images.

RECOMMENDED APPLICATIONS



**PUBLIC
TRANSPORT**
Bus / Coach



**SCHOOL
BUS**
Student
Safety



**DRIVER
MONITORING**
Support
Systems



**PASSENGER
SAFETY**
In-cabin
Monitoring



**COMMERCIAL
VEHICLE**

TECHNICAL SPECIFICATIONS


ITEM	SPECIFICATIONS
Image Sensor	1/2.8" 2Megapixel SONY CMOS (EXMOR)
Total pixels	1945(H) X 1109(V) = 2.16M pixels
Active pixels	1937(H) X 1097(V) = .2.12M pixels
LENS	2.8MM , 3.6MM , 6MM ,
Resolution	Digital : 1080p 30fps
Min. illumination	More than 0.1lux [no ir led's]
Operating Temperature	-10°C ~ +50°C (Humidity: 0%RH ~ 80%RH)
Storage Temperature	-20°C ~ +60°C (Humidity: 0%RH ~ 80%RH)
S/N Ratio	More than 54dB (AGC off)
Frequency	50Hz / 60 Hz
Video out	TVI / AHD / CVBS
Power input (consumption)	DC12V (IR OFF : 80mA)

PERFORMANCE



DIMENSIONS

Unit : mm

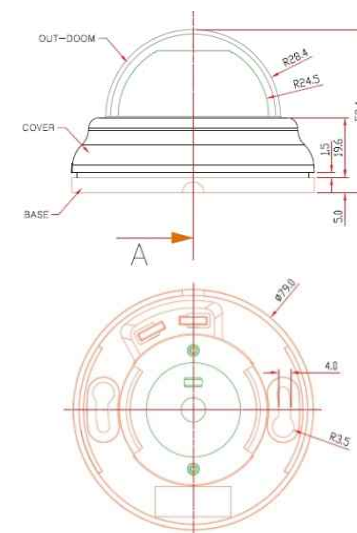

www.bk-solution.com

